

**CONFIGURATION**

<b>L</b>	Control	Standard Screw Adjustment
<b>S</b>	Adjustment Range	25 - 200 psi (1,7 - 14 bar), 200 psi (14 bar) Standard Setting
<b>N</b>	Seal Material	Buna-N
<b>(none)</b>	Material/Coating	Standard Material/Coating

Direct-acting, 3-way directional cartridges (3 to 4 open, 2 blocked) are switching devices typically used in moderate flow circuits. They can be used by themselves or to actuate larger pilot operated directional cartridges or logic cartridges. The valve shifts when the pressure differential between port 1 and port 4 exceeds the setting.

**TECHNICAL DATA**

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-21A
Series	1
Capacity	28 L/min.
Maximum Operating Pressure	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	30 cc/min.
Adjustment - No. of CW Turns from Min. to Max. setting	5
Valve Hex Size	22,2 mm
Valve Installation Torque	41 - 47 Nm
Locknut Hex Size	15 mm
Locknut Torque	9 - 10 Nm
Seal kit - Cartridge	Buna: 990021007
Seal kit - Cartridge	Polyurethane: 990021002
Seal kit - Cartridge	Viton: 990021006
Model Weight	0.18 kg.

**CONFIGURATION OPTIONS**


Model Code Example: DRBRLSN

<b>CONTROL</b>	<b>(L)</b>	<b>ADJUSTMENT RANGE</b>	<b>(S)</b>	<b>SEAL MATERIAL</b>	<b>(N)</b>	<b>MATERIAL/COATING</b>
<b>L</b> Standard Screw Adjustment		<b>S</b> 25 - 200 psi (1,7 - 14 bar), 200 psi (14 bar) Standard Setting		<b>N</b> Buna-N		Standard Material/Coating
<b>C</b> Tamper Resistant - Factory Set		<b>E</b> 25 - 400 psi (1,7 - 28 bar), 200 psi (14 bar) Standard Setting		<b>V</b> Viton		IAP Stainless Steel, Passivated
<b>K</b> Handknob		<b>N</b> 60 - 800 psi (4 - 55 bar), 200 psi (14 bar) Standard Setting				
<b>O</b> Handknob with Panel Mount						

**TECHNICAL FEATURES**

- Note: 800 psi (55 bar) is the highest setting possible with this valve.
- Maximum pressure at port 3 should be limited to 3000 psi (210 bar). This is due to fatigue strength limits not hydraulic operating limits.
- The flow path between port 2 and port 3 is bidirectional.
- Because of their direct-acting design, these cartridges feature low internal leakage and low pilot flow consumption.
- This valve is not bistable; it is capable of modulating between the two positions shown.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

**PERFORMANCE CURVES**

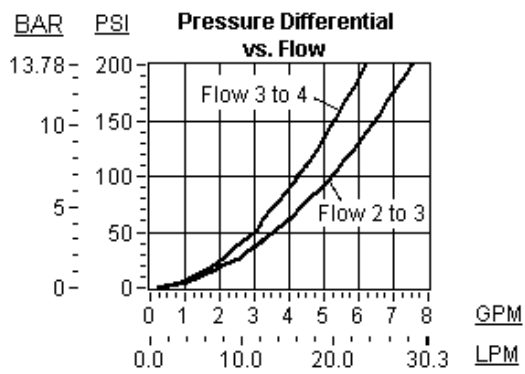

**RELATED MODELS**

- [DRBRX](#) 3-way, direct-acting, fixed setting, directional valve with drain to port 4 (3 to 4 open, port 2 blocked)