
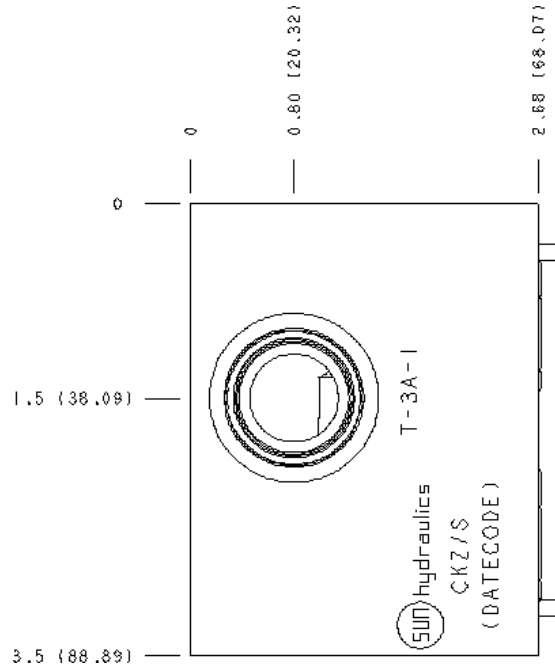


Relief, A to B and B to A



### CONFIGURATION

/S Modifier 65-45-12 Ductile Iron, Buna-N, Blackened

### TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 07
Body Features	A to B and B to A
Open Cavities	2
Cavity	T-3A
Model Weight	3.93 kg.

### NOTES

**Important:** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

### INCLUDED COMPONENTS

Part	Description	Quantity
340-005	Pipe Plug	2
500-001-111	O-Ring	2
500-001-118	O-Ring	4
811-001-006	Pin	2

### CONFIGURATION OPTIONS

Model Code Example: CKZ/S

MODIFIER (S)

- /S 65-45-12 Ductile Iron, Buna-N, Blackened
- 6061-T651 Aluminum, Buna-N
- /V 6061-T651 Aluminum, Viton
- /Y 65-45-12 Ductile Iron, Viton, Blackened


### MANIFOLD FACES

#### FACE GRID


1	2	3	4
5	6	7	8
9	10	11	12

### Face 2


2.68 (68.07)

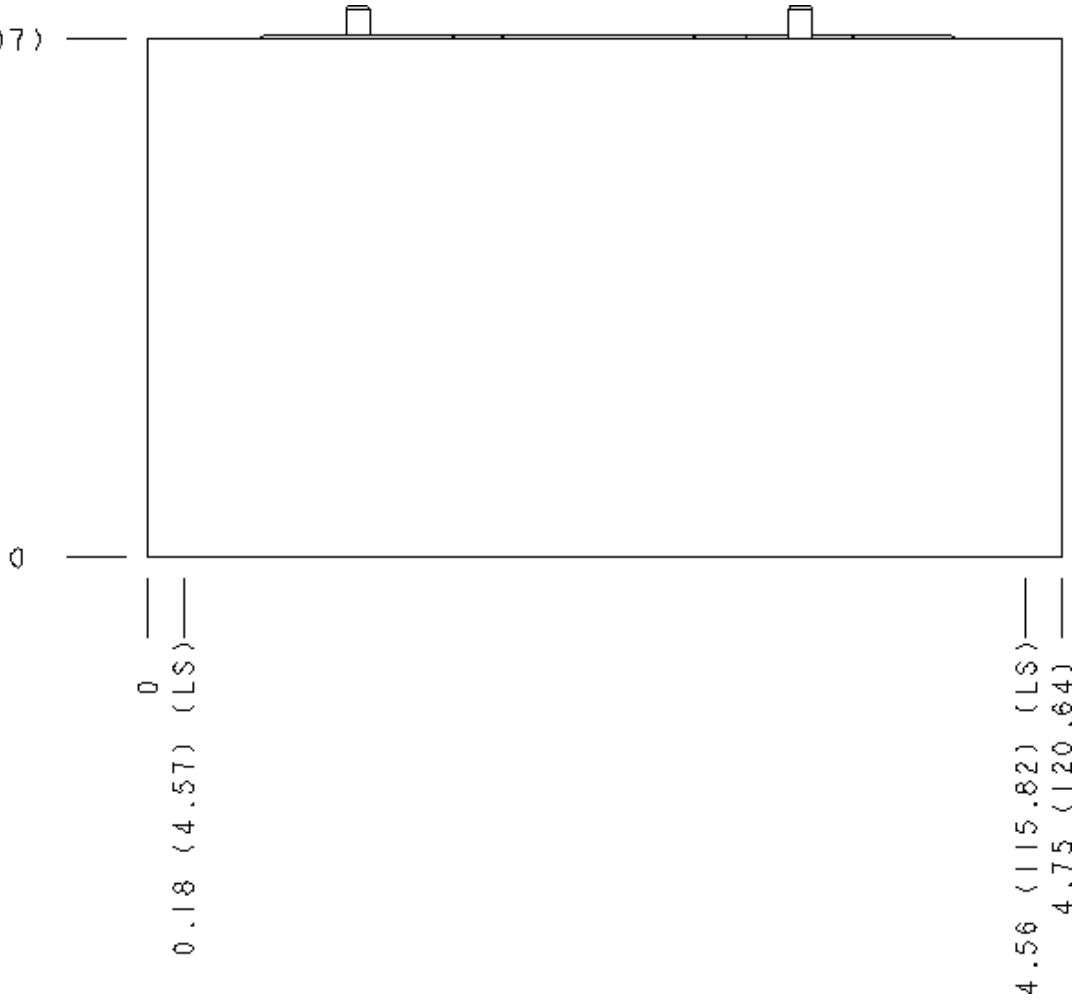


### Face 5

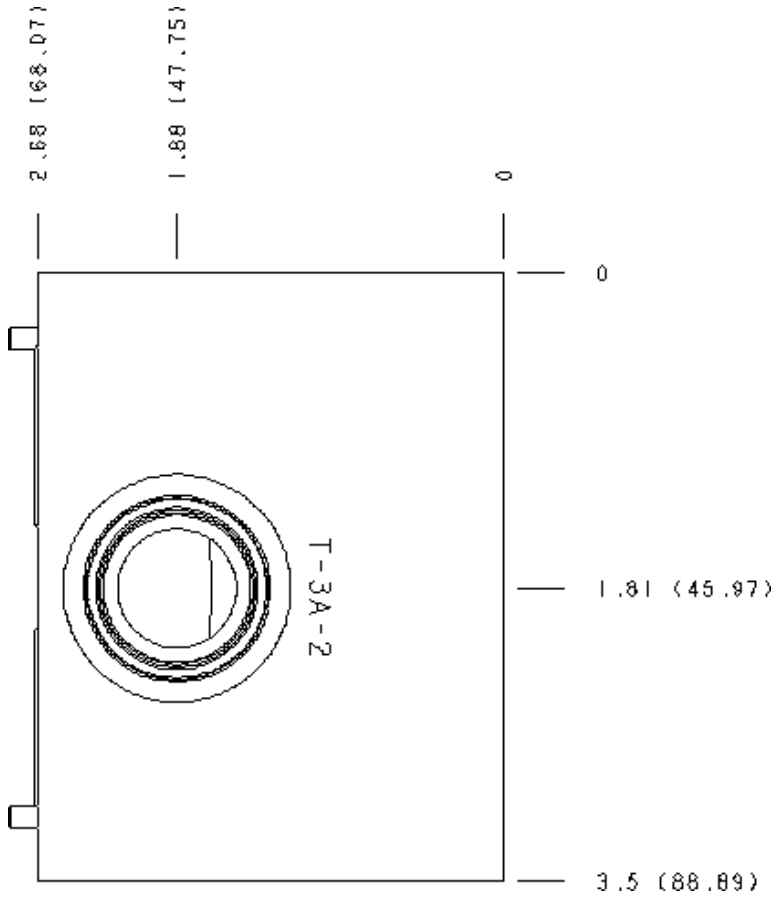

# Face 6

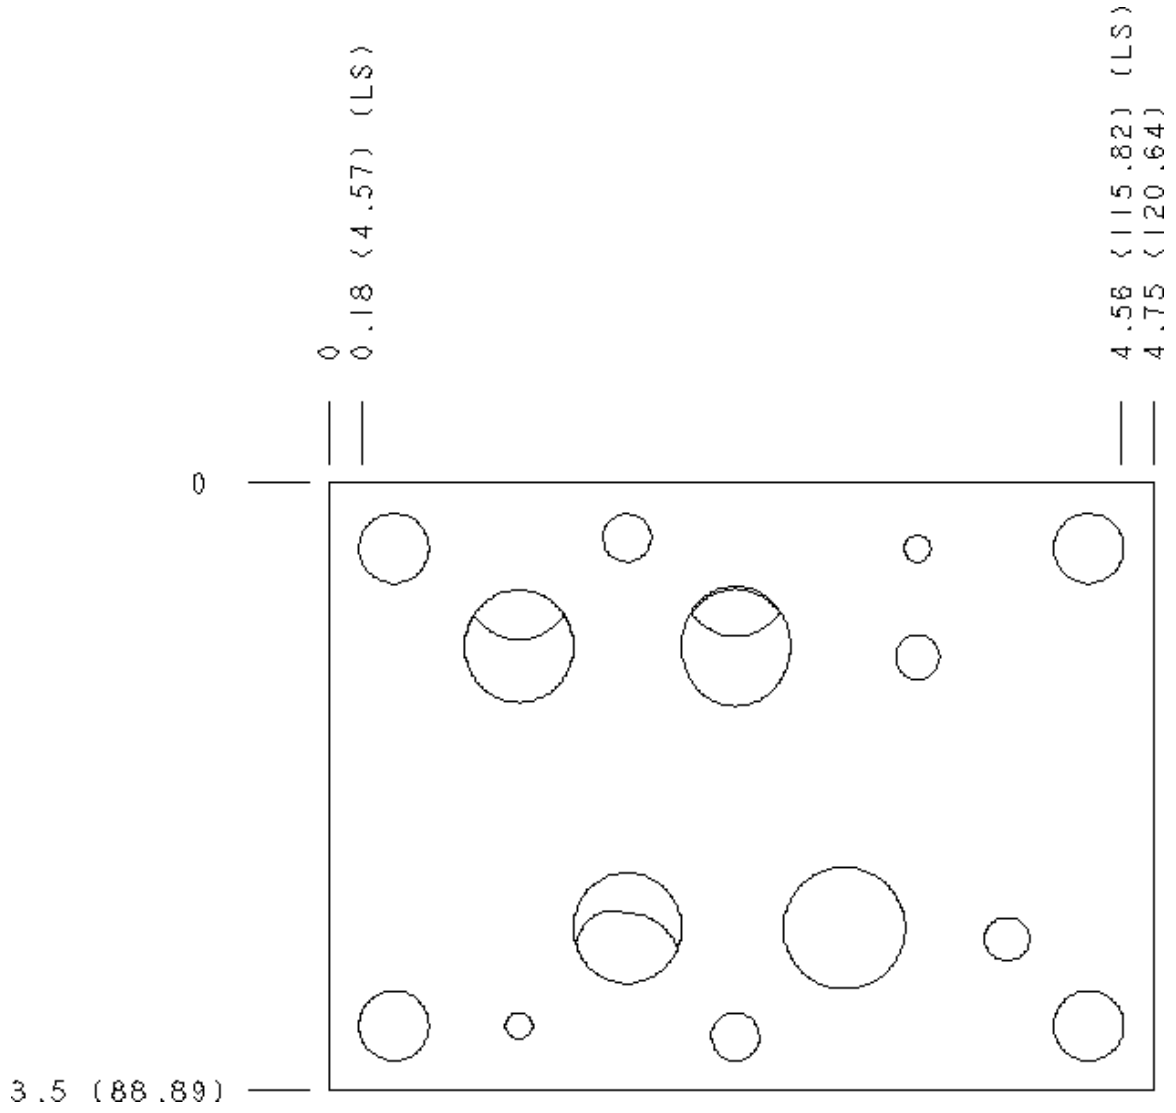


Face 7

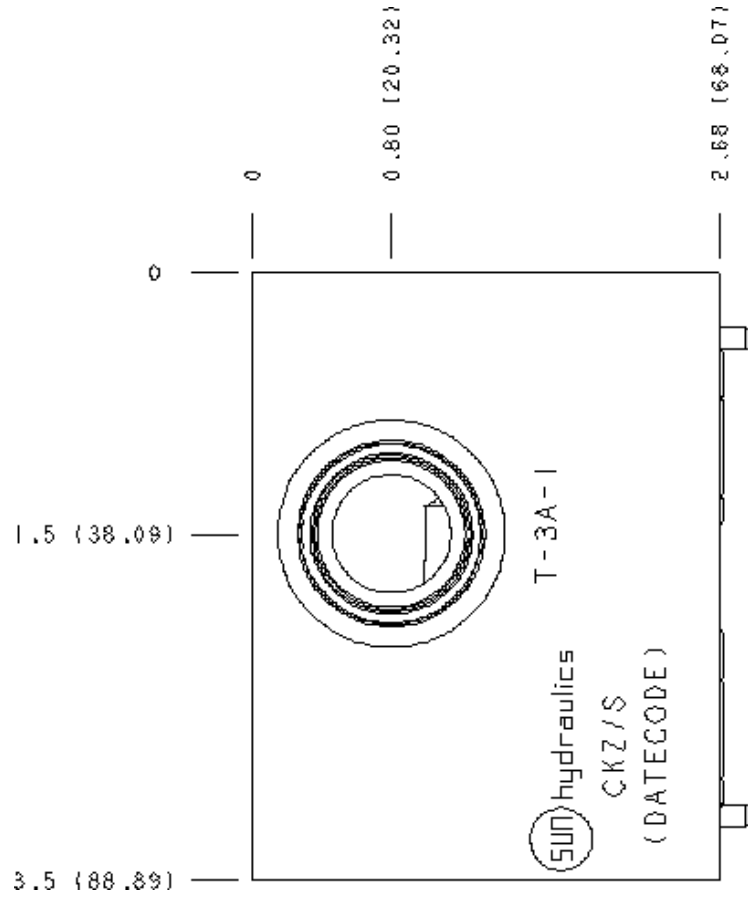

# Face 8

4.75 (120.64)  
4.56 (115.82) (LS)

0.18 (4.57) (LS)  
0

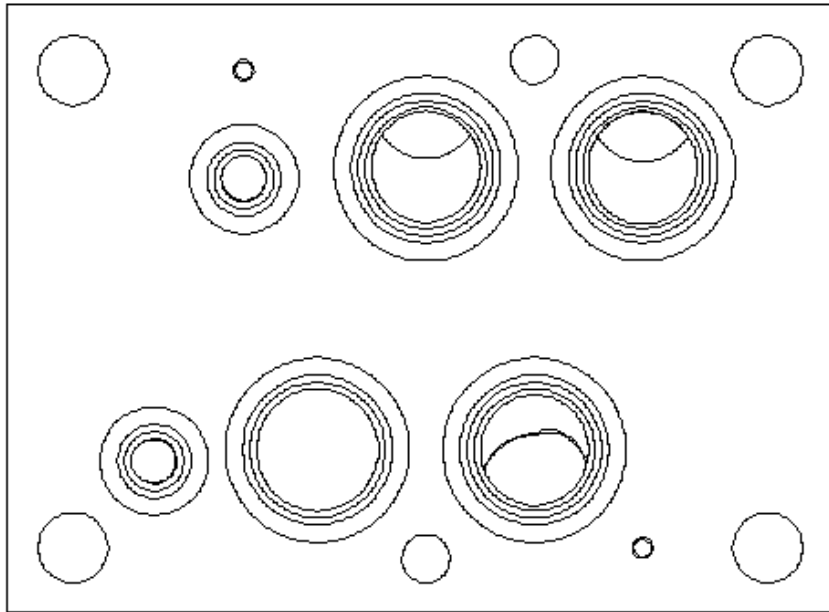

0

3.5 (88.89)

Face 10

