



snhy.com/E



CONFIGURATION

/S Modifier 65-45-12 Ductile Iron, Buna-N, Blackened

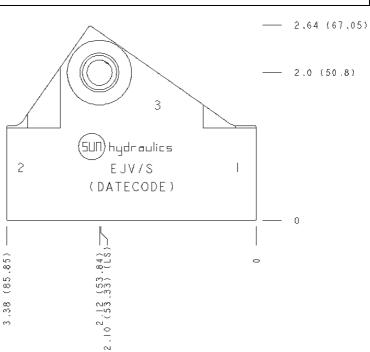

TECHNICAL DATA

Body Type	Line mount
Interface	None
Body Features	Inline
Mounting Hole Diameter	8.6 mm
Mounting Hole Depth	Through
Mounting Hole Quantity	2
Open Cavities	1
Cavity	T-11A
Port Size	1/2" BSPP
Model Weight	1.01 kg.

(/S)


Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port NOTES type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

C	JNFIGURA	ATION OF	PHONS
M	odel Code	Example	e: EJV/



S IS



6061-T651 Aluminum, Buna-N

MANIFOLD FACES

FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12

