
# ISO 03: On A or B, port 3 to opposite side CAVITY: T-11A



snhy.com/EBA

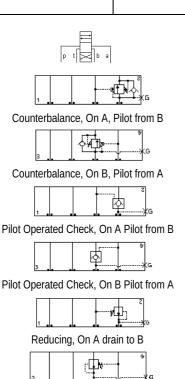

Reducing, On B drain to A

Reducing/Relieving, On A tank to B

Reducing/Relieving, On B tank to A

### CONFIGURATION

/M Modifier 6061-T651 Aluminum, Metric, Buna-N

**NOTES** • Stack height value in technical data table includes seal retainer plate.

• Customer to install locating pin according to functional orientation required.

• Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

### PORT DESIGNATORS

#### INCLUDED COMPONENTS

Modifiers	Ports
EBA, /S, /V, /Y	Gage Port (Plugged): 1/4" NPTF;
EBA/M, /T, /W, /Z	Gage Port (Plugged): 1/4" BSPP;


Part	Description	Quantity
330-018-002	Plug	1
500-001-012	O-Ring	4
700-002	Seal Plate	1
811-001-006	Pin	1
850-004-250	Plug	1

### CONFIGURATION OPTIONS Model Code Example: EBA/M

MODIFIER	(/M)
IM 6061-T651 Aluminum, Metric, Buna-N	
6061-T651 Aluminum, Buna-N	
IS 65-45-12 Ductile Iron, Buna-N, Blackened	
/T 65-45-12 Ductile Iron, Metric, Buna-N, Blackened	
IV 6061-T651 Aluminum, Viton	
/W 65-45-12 Ductile Iron, Metric, Viton, Blackened	
<b>/Y</b> 65-45-12 Ductile Iron, Viton, Blackened	
17 6061 T651 Aluminum Motric Viton	

/Z 6061-T651 Aluminum, Metric, Viton

## MANIFOLD FACES

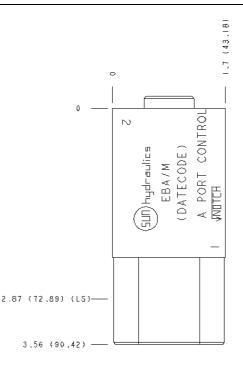



## TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 03
Body Features	On A or B, port 3 to opposite side
Stack Height	44,5 mm
Seal Plate Included (see notes)	Yes
Open Cavities	1
Cavity	T-11A
Port Size	1/4" NPTF
Model Weight	0.39 kg.


1	2	3	4
5	6	7	8
9	10	11	12




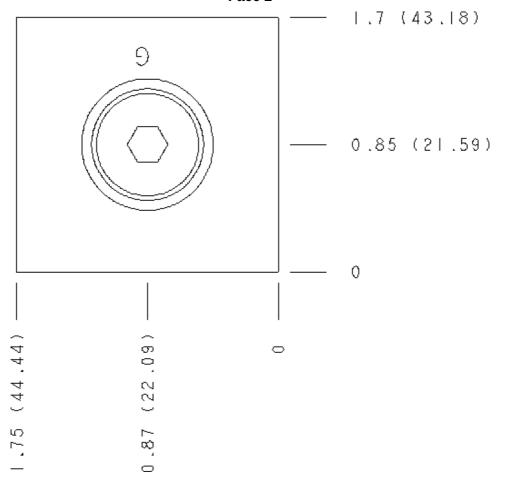


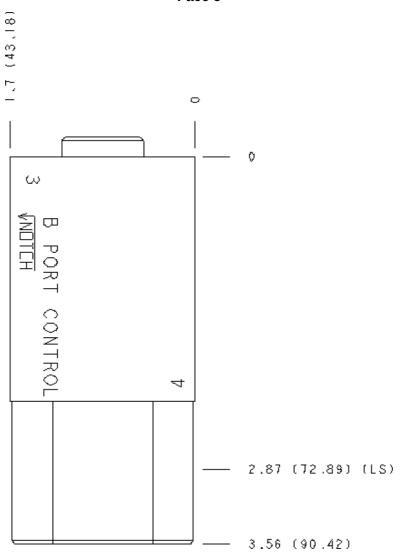

Face 5

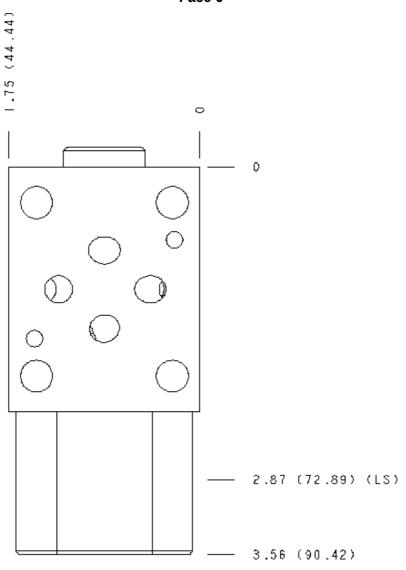

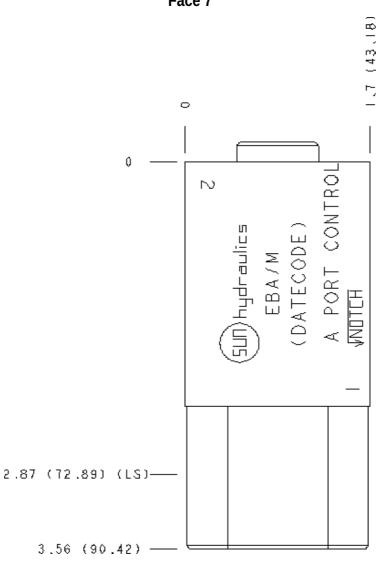

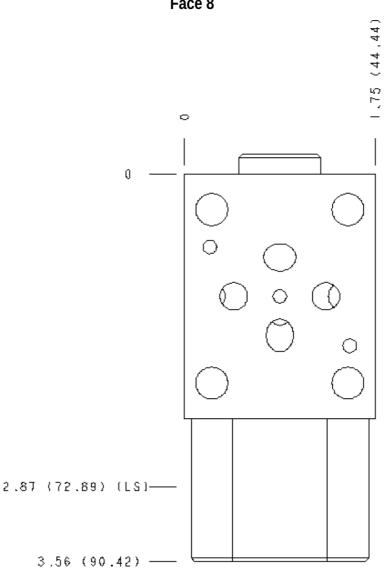

© 2018 Sun Hydraulics Corporation

#### 6 of 7

