


All ports blocked cavity plug SERIES 2 / CAVITY: T-22A



4 × 3 × 2 × 1

CONFIGURATION

X	Control	-
X	Adjustment Range	-
N	Seal Material	Buna-N

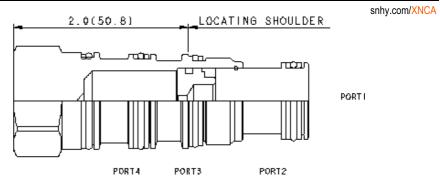

This cavity plug blocks all ports.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-22A	
Series	2	
Maximum Operating Pressure	350 bar	
Valve Hex Size	28,6 mm	
Valve Installation Torque	61 - 68 Nm	
Seal kit - Cartridge	Buna: 990022007	
Seal kit - Cartridge	Polyurethane: 990022002	
Seal kit - Cartridge	Viton: 990022006	
Model Weight	0.27 kg.	

CONFIGURATION OPTIONS

Model Code Example: XNCAXXN

CONTROL (X) ADJUSTMENT RANGE (X) SEAL MATERIAL (N

X - N Buna-N

E EPDM

V Viton

TECHNICAL FEATURES

• Cartridges configured with EPDM seals are for use in systems with phosphate ester fluids. Exposure to petroleum based fluids, greases and lubricants will damage the seals.

© 2019 Sun Hydraulics