


## CONFIGURATION

<b>X</b>	Control	Standard Pilot
<b>H</b>	Minimum Pilot Pressure	400 psi (28 bar)
<b>N</b>	Seal Material	Buna-N
<b>(none)</b>	Material/Coating	Standard Material/Coating

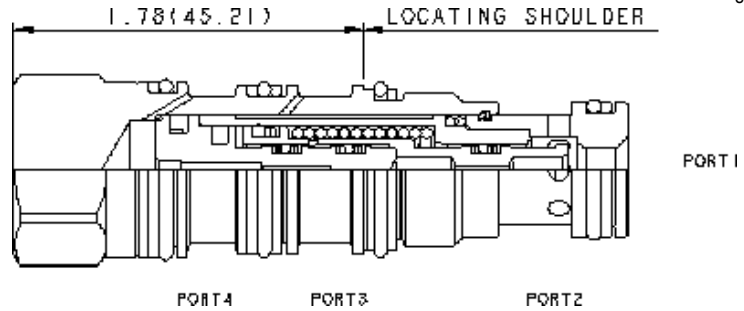

This is a normally open, balanced poppet, switching element. Pilot pressure at port 3 shifts the valve to the closed position.

## TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-21A
Series	1
Capacity	60 L/min.
Minimum Pilot Pressure Required to Shift Valve	28 bar
Maximum Operating Pressure	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	0,7 cc/min.@350 bar
Pilot Volume Displacement	0,16 cc
Pilot Passage into Valve	0,8 mm
Valve Hex Size	22,2 mm
Valve Installation Torque	41 - 47 Nm
Seal kit - Cartridge	Buna: 990021007
Seal kit - Cartridge	EPDM: 990021014
Seal kit - Cartridge	Polyurethane: 990021002
Seal kit - Cartridge	Viton: 990021006
Model Weight	0.16 kg.

## CONFIGURATION OPTIONS

**Model Code Example: DODSXHN**

CONTROL	(X) MINIMUM PILOT PRESSURE	(H) SEAL MATERIAL	(N) MATERIAL/COATING
<b>X</b> Standard Pilot	<b>H</b> 400 psi (28 bar)	<b>N</b> Buna-N <b>E</b> EPDM <b>V</b> Viton	Standard Material/Coating <b>/AP</b> Stainless Steel, Passivated <b>/LH</b> Mild Steel, Zinc-Nickel

## TECHNICAL FEATURES

- Unique balanced construction provides predictable switching with 5000 psi (350 bar) at both ports 1 and 2, with the external drain open and a minimum pilot pressure of 400 psi (30 bar).
- Valve will open when the pilot pressure falls below 145 psi (10 bar).
- These valves are hydraulically balanced between port 1 and port 2.
- Port 1 and port 2 are fully sealed from port 3 and port 4. Ports 3 and 4 are positively sealed.
- Any backpressure at the drain port is directly additive to the required pilot pressure for reliable operation.
- Leakage rate between port 1 and port 2 is very low, typically less than 10 drops/min. at 5000 psi (0,7 cc/min at 350 bar).
- Cartridges configured with EPDM seals are for use in systems with phosphate ester fluids. Exposure to petroleum based fluids, greases and lubricants will damage the seals.
- All ports will accept 5000 psi (350 bar).
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

## PERFORMANCE CURVES

