

Pilot-operated, pressure reducing valves reduce a high primary pressure at the inlet (port 2) to a constant reduced pressure at port 1, allowing circuits with multiple pressure requirements to be operated using a single pump.

CONFIGURATION

L	Control	Standard Screw Adjustment
W	Adjustment Range	150 - 4500 psi (10,5 - 315 bar), 200 psi (14 bar) Standard Setting
N	Seal Material	Buna-N
(none)	Material/Coating	Standard Material/Coating

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-19A
Series	4
Capacity	320 L/min.
Factory Pressure Settings Established at	blocked control port (dead headed)
Maximum Operating Pressure	350 bar
Control Pilot Flow	0,25 - 0,33 L/min.
Adjustment - No. of CW Turns from Min. to Max. setting	5
Valve Hex Size	41,3 mm
Valve Installation Torque	474 - 508 Nm
Adjustment Screw Internal Hex Size	4 mm
Locknut Hex Size	15 mm
Locknut Torque	9 - 10 Nm
Seal kit - Cartridge	Buna: 990019007
Seal kit - Cartridge	EPDM: 990019014
Seal kit - Cartridge	Polyurethane: 990019002
Seal kit - Cartridge	Viton: 990019006
Model Weight	1.31 kg.

NOTES

Maximum pressure differentials for spring ranges: A and B are 3000 psi (210 bar) N and Q are 2000 psi (140 bar) W is 5000 psi (350 bar) inlet pressure

CONFIGURATION OPTIONS


Model Code Example: PBJLWN

CONTROL	(L) ADJUSTMENT RANGE	(W) SEAL MATERIAL	(N) MATERIAL/COATING
L Standard Screw Adjustment	W 150 - 4500 psi (10,5 - 315 bar), 200 psi (14 bar) Standard Setting	N Buna-N	Standard Material/Coating
C Tamper Resistant - Factory Set		E EPDM	/AP Stainless Steel, Passivated
K Handknob	A 100 - 3000 psi (7 - 210 bar), 200 psi (14 bar) Standard Setting	V Viton	/LH Mild Steel, Zinc-Nickel
Q Capped and Lockwired	B 50 - 1500 psi (3,5 - 105 bar), 200 psi (14 bar) Standard Setting		
W Hex Wrench Adjustment	J 25 - 1500 psi (1,7 - 105 bar), 200 psi (14 bar) Standard Setting		
Y Tri-Grip Handknob	N 60 - 800 psi (4 - 55 bar), 200 psi (14 bar) Standard Setting		
	Q 60 - 400 psi (4 - 28 bar), 200 psi (14 bar) Standard Setting		

TECHNICAL FEATURES

- All three-port pressure reducing and reducing/relieving cartridges are physically interchangeable (i.e. same flow path, same cavity for a given frame size). When considering mounting configurations, it is sometimes recommended that a full capacity return line (port 3) be used with reducing/relieving cartridges.
- Full reverse flow from reduced pressure (port 1) to inlet (port 2) may cause the main spool to close. If reverse free flow is required in the circuit, consider adding a separate check valve to the circuit.
- If pilot flow consumption is critical, consider using direct acting reducing/relieving valves.
- Main stage orifice is protected by a 150 micron stainless steel screen.
- Recommended maximum inlet pressure is determined by the adjustment range. Ranges D, E, N, and Q are tested with a 2000 psi (140 bar) maximum differential between inlet and reduced pressure. Ranges A, B, and H are tested with a 3000 psi (210 bar) maximum differential between inlet and reduced pressure. Ranges C and W are tested with 5000 psi (350 bar) of inlet pressure.
- Pilot operated valves exhibit exceptionally flat pressure/flow characteristics, are very stable and have low hysteresis.
- Pressure at port 3 is directly additive to the valve setting at a 1:1 ratio and should not exceed 5000 psi (350 bar).
- Pilot operated reducing, reducing/relieving valves by nature are not fast acting valves. For superior dynamic response, consider direct acting valves.
- Cartridges configured with EPDM seals are for use in systems with phosphate ester fluids. Exposure to petroleum based fluids, greases and lubricants will damage the seals.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

PERFORMANCE CURVES

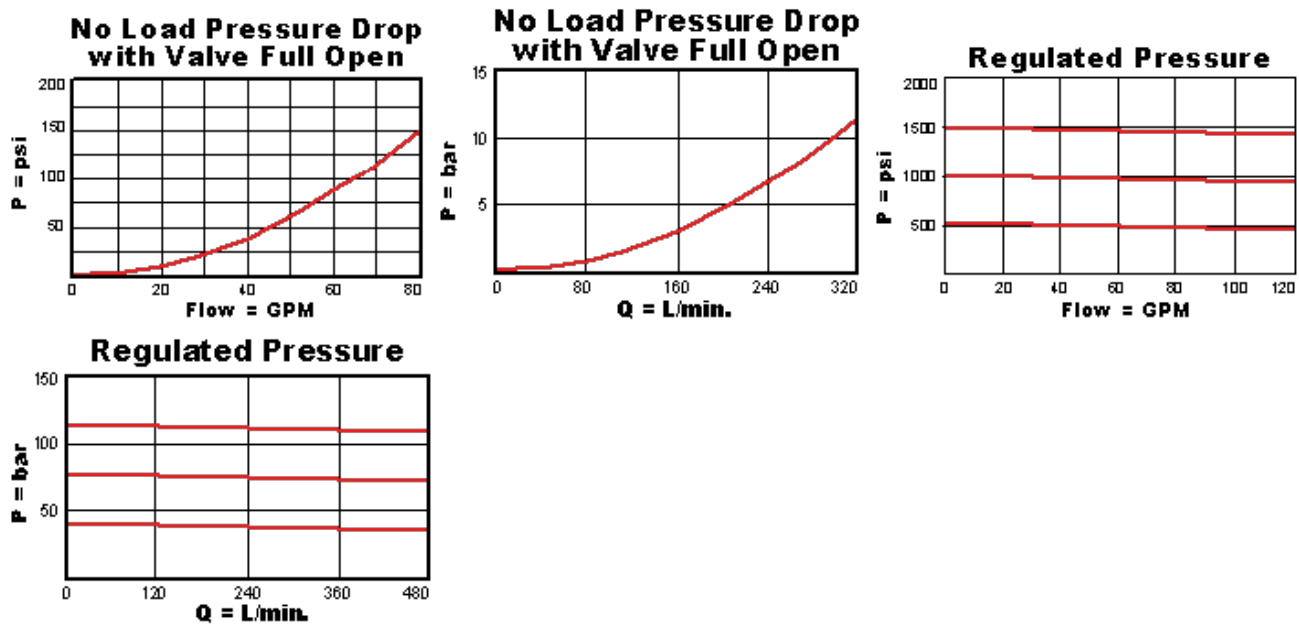

RELATED MODELS

- [PBJB8](#) Pilot-operated, pressure reducing main stage with integral T-8A control cavity