

CONFIGURATION

X	Control	Not Adjustable
A	Adjustment Range	-
N	Seal Material	Buna-N
(none)	Material/Coating	Standard Material/Coating

Air-bleed and start-up cartridges are used to purge air trapped in the system to help reduce power requirements and facilitate pump priming during the start-up of blocked center circuits.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-3A
Series	2
Capacity	15 - 200 L/min.
Maximum Operating Pressure	350 bar
Valve Hex Size	28,6 mm
Valve Installation Torque	61 - 68 Nm
Seal kit - Cartridge	Buna: 990203007
Seal kit - Cartridge	Polyurethane: 990003002
Seal kit - Cartridge	Viton: 990203006
Model Weight	0.18 kg.

CONFIGURATION OPTIONS


Model Code Example: **NQEBXAN**

CONTROL	(X) ADJUSTMENT RANGE	(A) SEAL MATERIAL	(N) MATERIAL/COATING
X Not Adjustable	A -	N Buna-N E EPDM V Viton	Standard Material/Coating /AP Stainless Steel, Passivated /LH Mild Steel, Zinc-Nickel

TECHNICAL FEATURES

- Air-bleed and start-up valves require a minimum of 4 gpm (15 L/min.) flow rate and 80 psi (5,5 bar) system pressure.
- The valve will re-open when system pressure falls below 25 psi (1,7 bar)
- After air has been purged, closing times vary from approximately 12 seconds at 4 gpm (15 L/min.) to 0.5 seconds at 50 gpm 200 L/min.).
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

PERFORMANCE CURVES

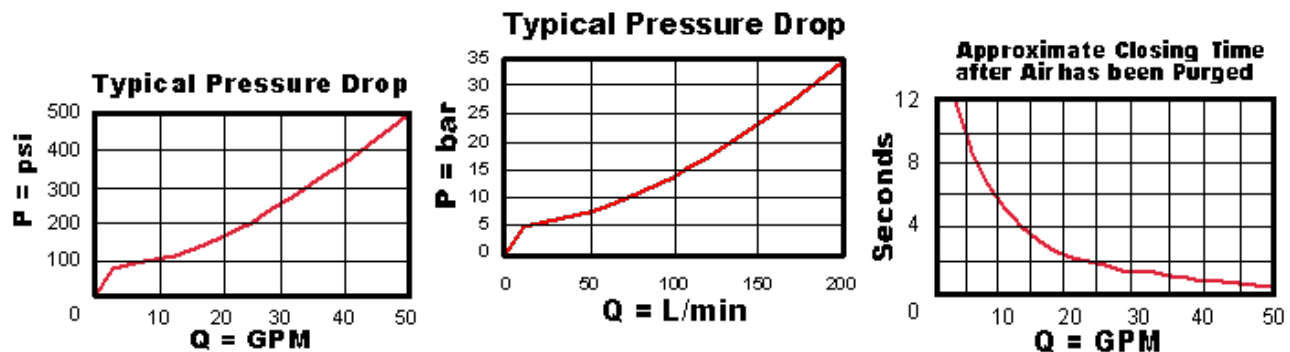

**Approximate Closing Time
after Air has been Purged**

