


3-Port Atmospherically Referenced, Non-adjustable

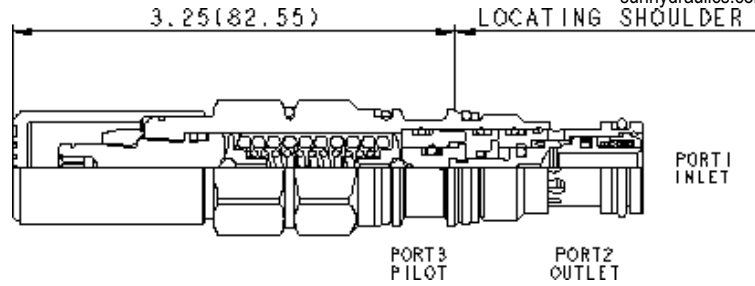

Atmospherically vented counterbalance valves with pilot assist are meant to control an overrunning load. The check valve allows free flow from the directional valve (port 2) to the load (port 1) while a direct-acting, pilot-assisted relief valve controls flow from port 1 to port 2. Pilot assist at port 3 lowers the effective setting of the relief valve at a rate determined by the pilot ratio. Backpressure at port 2 does not affect the valve setting because the spring chamber is atmospherically referenced.

Other names for this valve include motion control valve and over-center valve.

### CONFIGURATION

|               |                          |  |
|---------------|--------------------------|--|
| <b>C</b>      | Control                  | Tamper Resistant - Factory Set                                       |
| <b>G</b>      | Functional Setting Range | 2000 - 6000 psi (140 - 420 bar), 4000 psi (280 bar) Standard Setting |
| <b>N</b>      | Seal Material            | Buna-N   |
| <b>(none)</b> | Material/Coating         | Standard Material/Coating  |

### TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

|   |                  |
|---|------------------|
| Cavity  | T-11A            |
| Series  | 1                |
| Capacity  | 60 L/min.        |
| Pilot Ratio   | 5:1              |
| Maximum Recommended Load Pressure at Maximum Setting    | 320 bar          |
| Maximum Setting   | 420 bar          |
| Factory Pressure Settings Established at                | 30 cc/min.       |
| Maximum Valve Leakage at Reseat                         | 0,3 cc/min.      |
| Check Cracking Pressure                                 | 2,8 bar          |
| Adjustment - No. of CCW Turns from Min. to Max. Setting | 5                |
| Operating Characteristic                                | Standard         |
| Reseat  | >85% of setting  |
| Valve Hex Size  | 22,2 mm          |
| Valve Installation Torque                               | 41 - 47 Nm       |
| Adjustment Screw Internal Hex Size                      | 4 mm             |
| Locknut Hex Size  | 15 mm            |
| Locknut Torque  | 9 - 10 Nm        |
| Seal kit - Cartridge                                    | Buna: 990211007  |
| Seal kit - Cartridge                                    | EPDM: 990011014  |
| Seal kit - Cartridge                                    | Viton: 990211006 |
| Model Weight  | 0.23 kg.         |

### CONFIGURATION OPTIONS

Model Code Example: CACGCGN

| CONTROL                                 | (C) FUNCTIONAL SETTING RANGE  | (G) SEAL MATERIAL | (N) MATERIAL/COATING            |
|---|---|-------------------|---------------------------------|
| <b>C</b> Tamper Resistant - Factory Set | <b>G</b> 2000 - 6000 psi (140 - 420 bar), 4000 psi (280 bar) Standard Setting | <b>N</b> Buna-N   | Standard Material/Coating       |
| <b>L</b> Standard Screw Adjustment      | <b>F</b> 1000 - 2500 psi (70 - 175 bar), 2000 psi (140 bar) Standard Setting  | <b>E</b> EPDM     | /AP Stainless Steel, Passivated |
|   |   | <b>V</b> Viton    | /LH Mild Steel, Zinc-Nickel     |

## TECHNICAL FEATURES

- Counterbalance valves should be set at least 1.3 times the maximum load induced pressure.
- Turn adjustment clockwise to decrease setting and release load.
- Full clockwise setting is 200 psi (14 bar).
- Approximately 1 drop (0,07 cc) of fluid will pass from the pilot area to the vented spring chamber every 4000 cycles.
- Reseat exceeds 85% of set pressure when the valve is standard set. Settings lower than the standard set pressure may result in lower reseat percentages.
- Cartridges configured with EPDM seals are for use in systems with phosphate ester fluids. Exposure to petroleum based fluids, greases and lubricants will damage the seals.
- Sun counterbalance cartridges can be installed directly into a cavity machined in an actuator housing for added protection and improved stiffness in the circuit.
- This valve has positive seals between all ports.
- With vented valves, a lower pilot ratio may be required to achieve machine stability compared to non-vented valves.
- Three-port vented valves are atmospherically referenced and considered problem solvers for existing circuits using non-vented valves. Over time, the vented valves may leak externally or allow moisture into the spring chamber. Four-port vented counterbalance valves are recommended for new applications.
- All 3-port counterbalance, load control, and pilot-to-open check cartridges are physically interchangeable (i.e. same flow path, same cavity for a given frame size).
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

## PERFORMANCE CURVES

