


M or S-Control, A-Spool

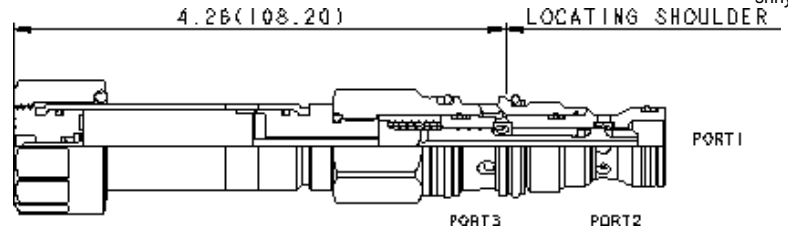

This solenoid-operated 3-way, 2-position cartridge is a direct-acting, balanced spool directional valve.

CONFIGURATION

M	Control	Manual Override
A	Spool Configuration	Normally Open 1 to 2, Closed 2 to 3
N	Seal Material	Buna-N
(none)	Coil	No coil

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-11A
Series	1
Capacity	45 L/min.
Maximum Operating Pressure	350 bar
Response Time - Typical	50 ms
Maximum Valve Leakage at 110 SUS (24 cSt)	80 cc/min.@210 bar
Manual Override Force Requirement	33 N/100 bar @ Port 1
Manual Override Stroke	2,5 mm
Switching Frequency	15000 cycles/hr
Solenoid Tube Diameter	19 mm
Valve Hex Size	22,2 mm
Valve Installation Torque	41 - 47 Nm
Seal kit - Cartridge	Buna: 990411007
Seal kit - Cartridge	EPDM: 990411014
Seal kit - Cartridge	Viton: 990411006
Seal and nut kit - Coil	Viton: 990770006
Model Weight	0.28 kg.

NOTES

- Please verify cartridge clearance requirements when choosing a Sun manifold. Different valve controls and coils require different clearances.
- An additional 2.00 inches (50,8 mm) beyond the valve extension is needed for coil installation and removal.

CONFIGURATION OPTIONS

Model Code Example: DMDAMAN







CONTROL	(M) SPOOL CONFIGURATION	(A) SEAL MATERIAL	(N) COIL *
M Manual Override	A Normally Open 1 to 2, Closed 2 to 3	N Buna-N	No coil
X No Manual Override	N Normally Open 2 to 3, Closed 1 to 2	E EPDM	212 DIN 43650-Form A, 12 VDC
D Twist/Lock (Dual) Manual Override	B Normally Open 1 to 2, Closed 2 to 3, Closed Transition	V Viton	224 DIN 43650-Form A, 24 VDC
L Twist/Lock (Detent) Manual Override	P Normally Open 1 to 3, Closed 1 to 2		712 Twin Lead, 12 VDC
T Twist (Momentary) Manual Override	R Normally Open 2 to 3, Closed 1 to 2, Closed Transition		724 Twin Lead, 24 VDC
			912 Deutsch DT04-2P, 12 VDC
			924 Deutsch DT04-2P, 24 VDC





* Additional coil options are available

TECHNICAL FEATURES

- The solenoid tube assembly is fatigue rated for 5000 psi (350 bar) service.
- Spools B and R are closed in the transition between their two positions. This results in a higher performance limit at the expense of lower capacity. When used as pilot controls, where capacity is not a factor, the closed transition will provide faster and more consistent response times.
- This valve is direct actuated and requires no minimum hydraulic pressure for operation.
- On models equipped with the D or L control, the detent mechanism in the manual override is meant for temporary actuation. The D, L and T manual control assembly has a mechanical life expectancy of approximately 7,000 cycles.
- Cartridges configured with EPDM seals are for use in systems with phosphate ester fluids. Exposure to petroleum based fluids, greases and lubricants will damage the seals.
- This valve utilizes a wet armature design. This means that the working fluid surrounds the armature and is exposed to the heat generated by the coil. This can be a factor if the coil is energized for long periods of time. Some fluids, notably water/glycol mixtures, break down at these temperatures over time and form varnishes that will affect the function of the cartridge.
- Coils are interchangeable with other Sun Series 1 solenoid products and can be mounted on the tube in either direction.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

PERFORMANCE CURVES

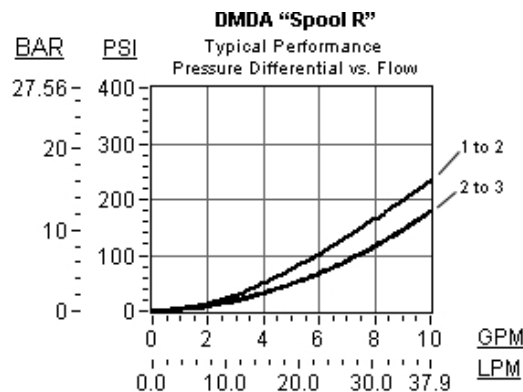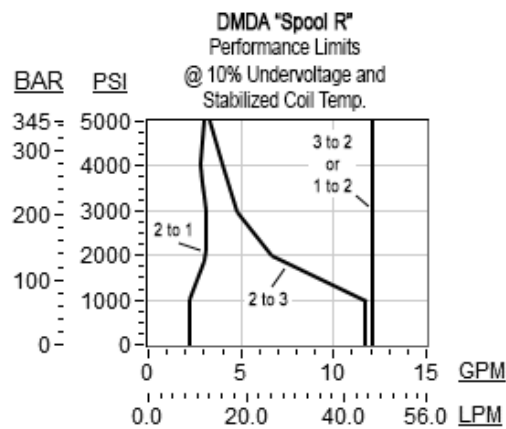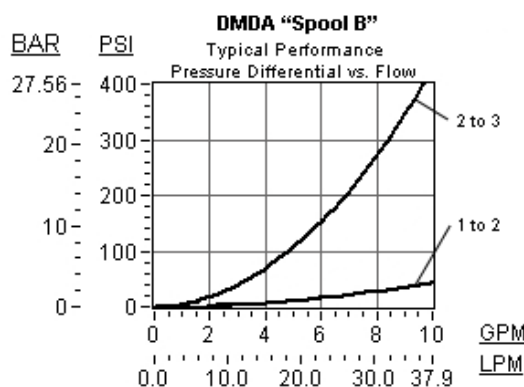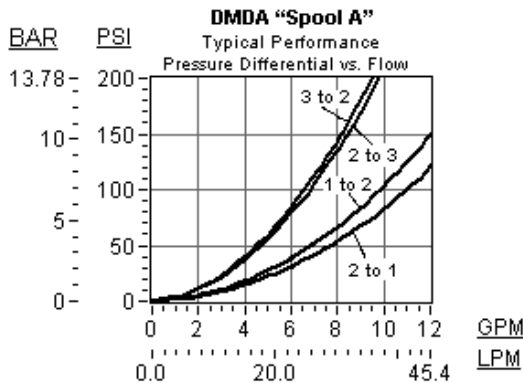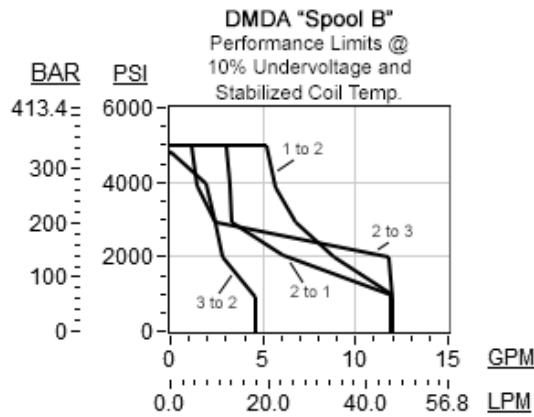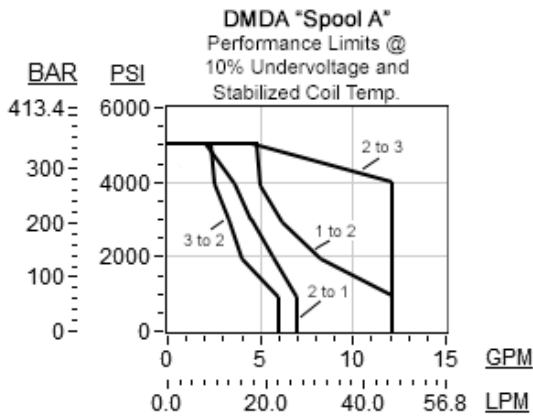

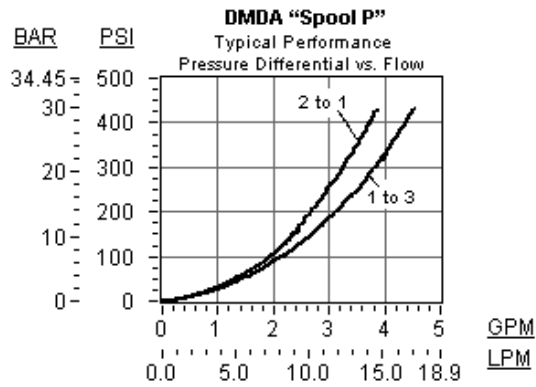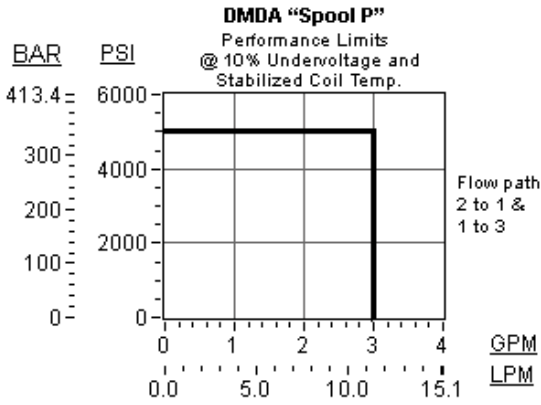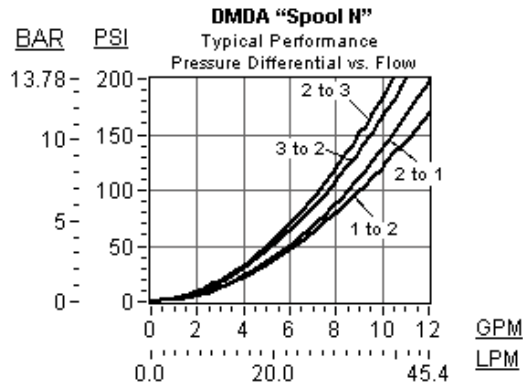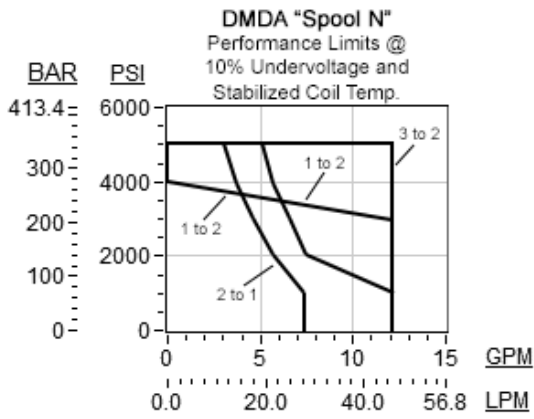

RELATED MODELS

- [DMDAS](#) 3-way, soft shift, solenoid-operated directional spool valve
- [DMDAZ](#) 3-way, solenoid-operated directional spool valve with position switch